



## Applications

- Seabed Remedial Works
- Sandwave Clearance
- Pre-Sweeping
- Shallow Water
- Jack-up Spudcan Clearing & Cleaning
- Harbour Clearance

## Capabilities

Max Jet Flow	5,500 L/s
Max Jet Pressure	25 kPa
Max Jet Power	135 kW
Minimum Operating Depth	2 m


## Benefits

- Controlled Flow Excavation
- Asset safe, non-contact operation
- Highly qualified & experienced operators
- Real time sonar monitoring of service
- 24 hour Engineering support
- Tailored Hybrid Jet Trenching Solutions
- Designed, manufactured and maintained in-house by Rotech Engineering

## Personnel

- 6 Rotech operators for 24hr operations

## Example TRS2-Blade Equipment Spread

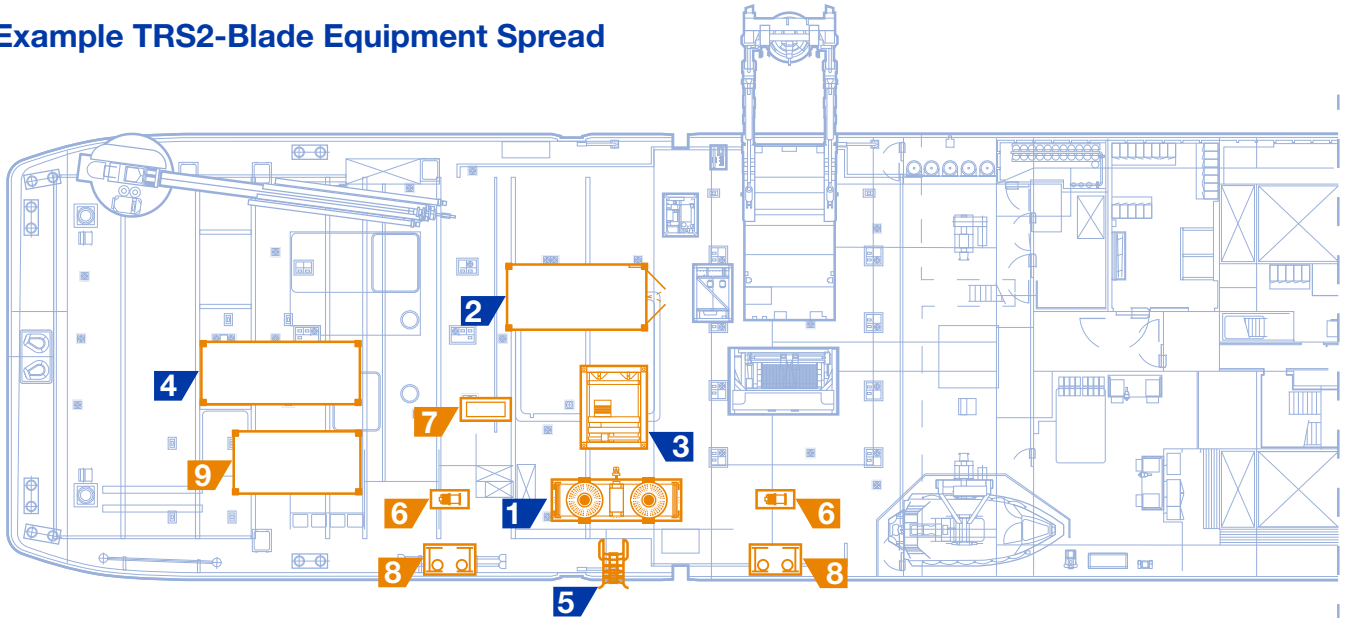

### Key

No.	Item	Dimensions (m)	Weight (kg)
1	TRS2-Blade Tool	5.40 x 1.83 x 2.40	12,000*
2	Twin Tool HPU	6.10 x 2.45 x 2.6	16,000
3	Hydraulic Umbilical Winch	3.00 x 2.40 x 2.60	11,000
4	Spares Container (Rotech)	6.10 x 2.45 x 2.90	12,000
5	Umbilical Chute	2.9 x 0.84 x 1.17	1,000
6	Hydraulic Deck Tugger (optional)	1.00 x 1.16 x 0.68	576
7	Tugger HPU (optional)	1.50 x 0.80 x 1.62	1,000
8	Universal Roller Fairlead (optional)	0.90 x 0.25 x 0.65	220
9	Control Cabin (optional)	3.97 x 2.44 x 2.90	5,000

\* All weights are approximate and may vary depending on exact configuration

For over three decades Rotech have pioneered the development of cutting edge subsea Controlled Flow Excavation (CFE) technology. A dedication to innovation has seen Rotech continually evolve and enhance our specialised equipment to meet demand and deliver for the needs of many major clients in the subsea oil & gas and energy sectors.